

STS 2000

Compact and Rack Type Design

Microprocessor Control

Hot-Swappable







STS 2000 1 phase, 2 pole static transfer switch transfers uninterruptedly critical loads to either of two independent AC power lines. The system monitors two AC inputs. If any of them goes out of the specified tolerance, it transfers the critical load to the other. By increasing the energy quality of the systems used with STS 2000, while reducing the effects of interference and short interruptions, a backup power system is gained.





GENERAL SPECIFICATIONS

- Full digital control with microprocessor controlled structure
- 2 AC inputs with 1 phase and neutral switching
- Easy installation and maintenance
- Compact and rack type design
- Wide input voltage range
- "Break Before Make" type transfer
- Very fast uninterrupted transfer even in case of any failure ($\leq 4\text{ms}$ - for synchronized sources)
- Selectable preferred source
- Fuse-free construction with a robust, high reliability SCR
- Digitally controlled system set points
- Programmable synchronized and unsynchronized transfers
- Isolation protection between sources with switched neutral
- Convenient and multifunctional front panel and diagnostic codes
- Transfer inhibit system over a certain current value
- Overload, over temperature and short circuit protections
- Convenience during maintenance and repair with Isolated Maintenance Bypass
- Remote monitoring of energy resources
- TCP / IP, SNMP, MODBUS and RS232 infrastructure for communication
- Dry-contact interface
- Internal cooling fans
- Hot-swap feature (Optional)
- Optional external AC power supply socket outlet
- Optional SNMP adaptor

STS2032 - STS2063 STANDARD

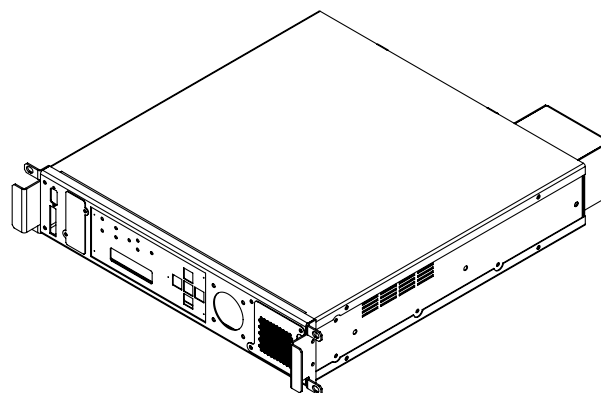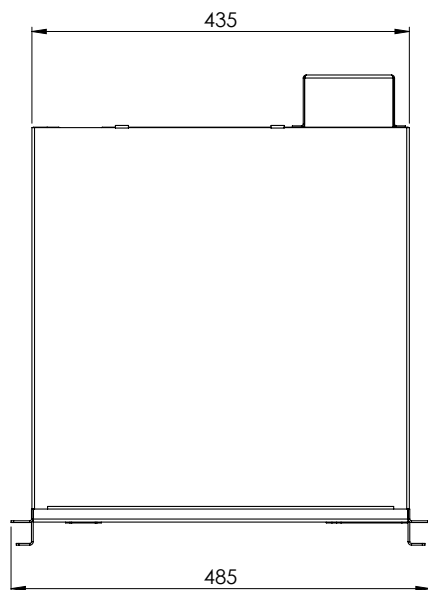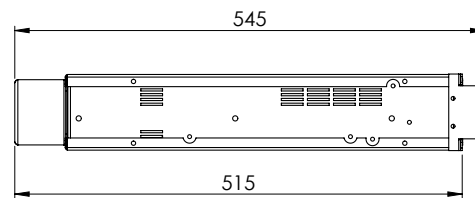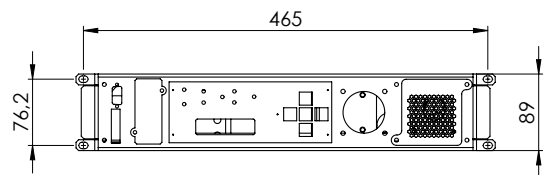

STS2032 - STS2063 HOT-SWAP

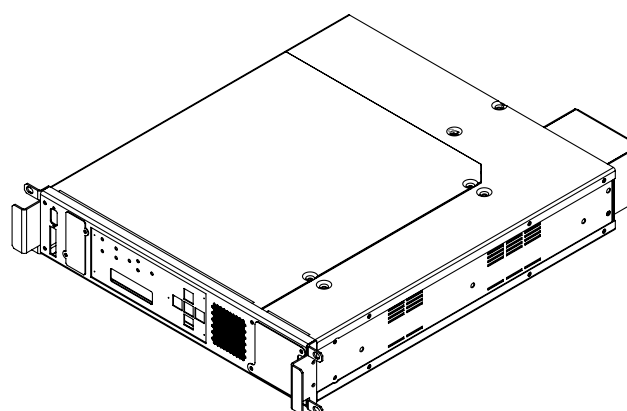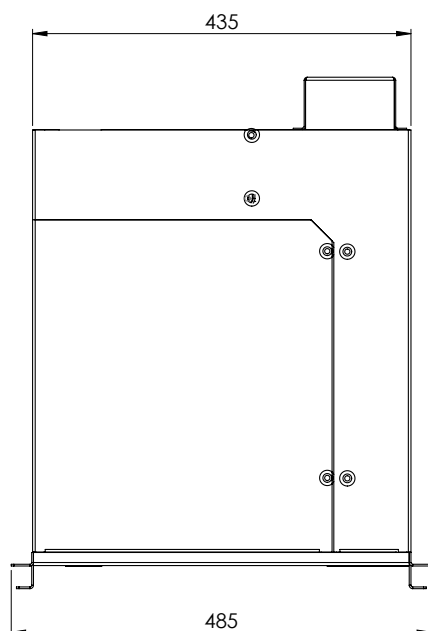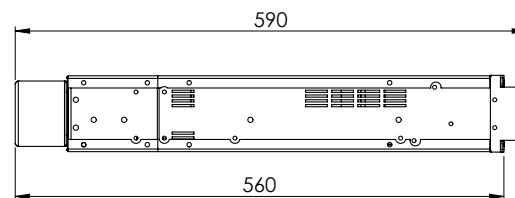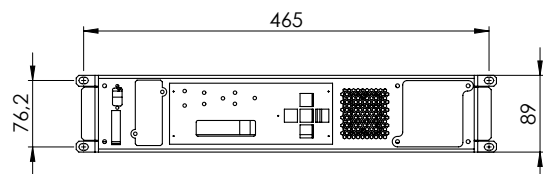

TECHNICAL SPECIFICATIONS

MODEL	STS2032		STS2063	STS2120
Nominal current	32 A		63 A	120 A
ELECTRICAL DATA				
Input voltage	220/230/240 VAC 1P + N + G			
Input voltage range	180-264 VAC (Ph-N)			
Input frequency	50Hz. / 60Hz.			
Input frequency range (operation range adjustable)	46-54Hz (for 50Hz)			
	56-64Hz (for 60Hz)			
Transfer type	"Break before make"			
Transfer methods available	Automatic / Manual / Remote			
Transfer control	synchron			
	with adjustable delay (non synchron)			
	zero current (non synchron)			
Transfer time	≤ 4 msec for synchronous sources			
	≤ 10 msec for non-synchronous sources			
Switching type	1 phase + Neutral switching (2-Poles)			
Output current crest factor	3:1			
Admissible overload	0-100% continuous			
	101-150% 1 minute			
	151-200% 10 seconds			
	> 200% 250 msec			
Protections	Output overload and short circuit protection, Overtemperature protection, Backfeed protection			
LCD panel and mimic	Standard			
Communication	RS232 standard, RS485 optional, SNMP optional			
TCP/IP connection	Optional			
Dry contacts	3 programmable relay outputs			
Breaking current capacity (SW1,SW2)	10kA			
ENVIRONMENTAL DATA				
Cooling	Forced cooling (redundant fans)			
Cooling air direction	From front to rear			
Operating temperature	0°C - 40°C			
Storage temperature	-10°C up to +50°C			
Relative humidity	90% max. (non-condensing)			
Protection degree	IP20			
Standards	EN62310-1, EN62310-2			
Max. operation height	1000m. at nominal current rating			
Acoustic noise	< 50 dBA			< 52 dBA
MECHANICAL DATA				
Weight (kg)	12	13		20
Dimensions	2U (19"rack), Width = 485mm, Depth = 545mm			3U (19"rack), Width = 485, Depth = 605mm
	2U (19"rack), Width = 485mm, Depth = 590mm (hot-swap)			3U (19"rack), Width = 485, Depth = 645mm (hot-swap)
Power cables connection	Clip-on terminals (on the rear panel)			